



GEARHEADS(ULTRA POWERFUL TYPE) Frame size 90mm sq. (3.54 in.sq.)

BALL BEARING TYPE

▶ **RATED TORQUE OF GEARHEAD**

MODEL	Speed(rpm)	500	300	200	120	100	60	50	30	20	15	10	9	6	5	3	2	1	
	Ratio	50Hz	3	5	7.5	12.5	15	25	30	50	75	100	150	166.7	250	300	500	750	1500
		60Hz	3.6	6	9	15	18	30	36	60	90	120	180	200	300	360	600	900	1800
L9UK□B L9V10D(DECIMAL)	kg-cm	16.5	27.5	41.3	62.1	74.5	112.2	134.6	224.4	300	300	300	300	300	300	300	300	300	
	N-m	1.62	2.70	4.05	6.08	7.30	11.00	13.19	21.99	29.40	29.40	29.40	29.40	29.40	29.40	29.40	29.40	29.40	
	oz-in	229	382	574	862	1034	1558	1870	3116	4166	4166	4166	4166	4166	4166	4166	4166	4166	

With Decimal Gearhead

- * The normal torque is that the motor and gearhead are directly coupled.
- * Insert the denominator of reduction ratio in □ of gearhead model name.
- * Actual rotation speed is 2~15% less than synchronous speed.
- * ■Color indicates that the rotation of gearhead shaft is in opposite direction as output shaft of motor.


INDUCTION MOTORS

DIMENSIONS

Unit : mm(inch)

DECIMAL GEARHEAD

L9V10D

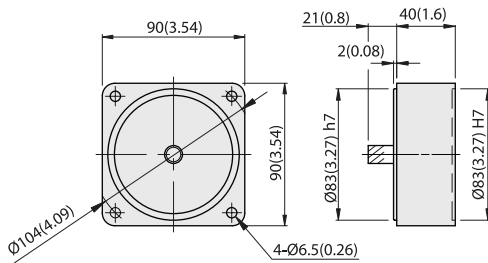


WEIGHT 0.6kg (1.3 lb)




GEARHEAD

L9UK□B

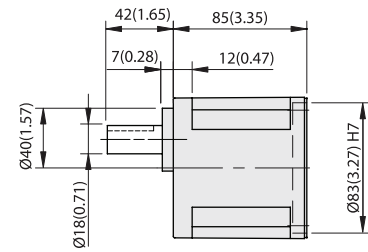

MODEL	GEAR RATIO	WEIGHT		BOLT
		kg	lb	
L9UK□B	1/3~1/200	1.95	4.3	M6xL20



KEY SIZE



L9UK□B + L9190P□H

