


SFC Series


Micro Flexible Coupling

Features


- Absorb large amplitude, eccentricity and end play simultaneously
- Absorb shock and vibration perfectly
- No lubrication and low inertia moment

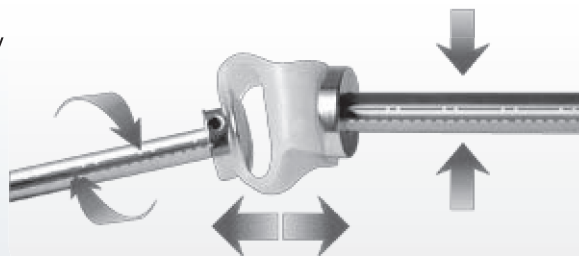

SFC 29, 38

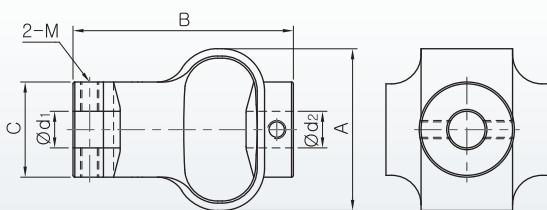

SFC 48, 54

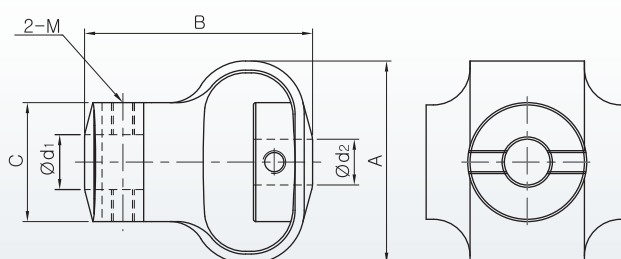

Standards & Performance

Product Number	Dimension (mm)(±0,3)			Mass (g)	Max. RPM (min ⁻¹)	Max Torque (N · m)	Angle (°)	Parallel (mm)	End-Play (mm)
	A	B	C						
SFC-29	29	28	18	19	3,000	0,35	10	2	1,5
SFC-38	38	35	22,5	38	3,000	1,35	10	2,5	2
SFC-48	48	50	26	60	3,000	1,8	12	2,5	2
SFC-54	54	58	29,5	140	3,000	4,5	12	3	2

Standard Inner diameter

Product Number	Standard Inner diameter (d ₁ , d ₂) Standard INNER Diameter (mm)								
	4	5	6	8	10	12	14	15	16
SFC-29	●	●	●	●	●				
SFC-38			●	●	●	●			
SFC-48				●	●	●	●		
SFC-54					●	●	●	●	●

※ Please contact us when you order the product without standard inner diameter

How to order product



※INNER diameter key type is not available about SFC type

※Please mark each inner diameter size.

※Please contact us when you order